



Curb Ramp Inspection Form

Must be filled out for every ramp constructed in City right-of-way in the City of Rancho Cordova. This form must be filled out and submitted within ten days of ramp construction to the ADA Program Access Coordinator.

Curb Ramp Location:

N/E N/W S/E S/W

Project Name: _____

N/S STREET _____

E/W STREET _____

Curb Ramps per City Standard Drawing 4-23 & 4-24:

Vertical Curb Rolled curb

Check One:

One Ramp Two Ramps

STANDARDS:

- NO POLES OR PULLBOXES SHALL BE LOCATED IN RAMPS
- ALL ELEMENTS, EXCEPT GUTTERS AND RETAINING CURBS, MUST BE CONSTRUCTED PLANAR IN NATURE, WITH WEAKENED PLANED JOINTS SCORED BETWEEN EACH ELEMENT.
- PAN MUST BE WITHIN STRIPED CROSSWALKS

A1: _____ B1: _____ C1: _____ D1: _____

A2: _____ B2: _____ C2: _____ D2: _____

A3: _____ B3: _____ C3: _____ D3: _____

RIGHT SIDE LENGTH: _____ FT. _____ IN.

PAN WIDTH: _____ FT. _____ IN.

LEFT SIDE LENGTH: _____ FT. _____ IN.

IF TWO RAMPS ON CORNER (DATA FOR 2ND RAMP):

E1: _____ F1: _____ G1: _____ H1: _____

E2: _____ F2: _____ G2: _____ H2: _____


E3: _____ F3: _____ G3: _____ H3: _____

RIGHT SIDE LENGTH: _____ FT. _____ IN.

PAN WIDTH: _____ FT. _____ IN.

LEFT SIDE LENGTH: _____ FT. _____ IN.

DISTANCE BETW. RAMPS: _____ FT. _____ IN.

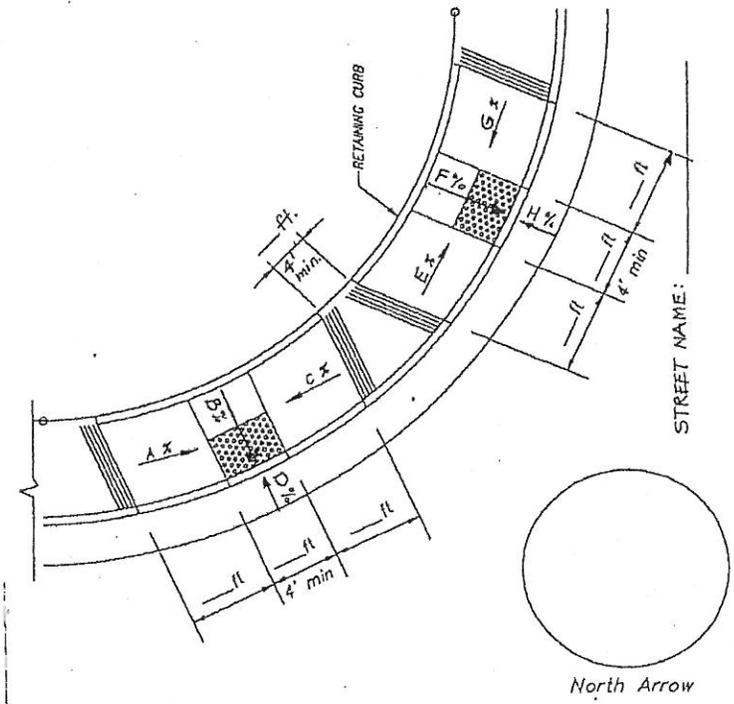

STREET NAME: _____

Inspected/measured by (print): _____ Date Field Measured: _____

Directions:

Three measurements for all data shall be taken at the ramps and pans, one measurement shall be taken at the centerline of the element and the other two shall be taken 18 inches on either side of the first measurement for the element. None of the three recorded measurements of any element may exceed the limits indicated above.

See reverse side for Compliance with Standards.