

Key change order summary for pontoon design and repairs

COMPLETED CHANGE ORDERS



Pontoon Construction Project

Cycle 1 spalling repairs to four pontoons in Aberdeen casting basin:

- Executed April 2013
- De-tensioned Pontoon V
- Removed spalled concrete
- Modified post-tensioning profile
- Reinforced bolt beam

Change order amount: \$9.9 M




Floating Bridge and Landings Project

Cycle 1 repairs to four pontoons on Lake Washington and in drydocks:

- Leasing and towing pontoons to drydocks in Portland and Seattle
- Cofferd cell construction and towing
- Epoxy injections
- Transverse post-tensioning
- Carbon-fiber wrap

Change order amount: \$48.7 M

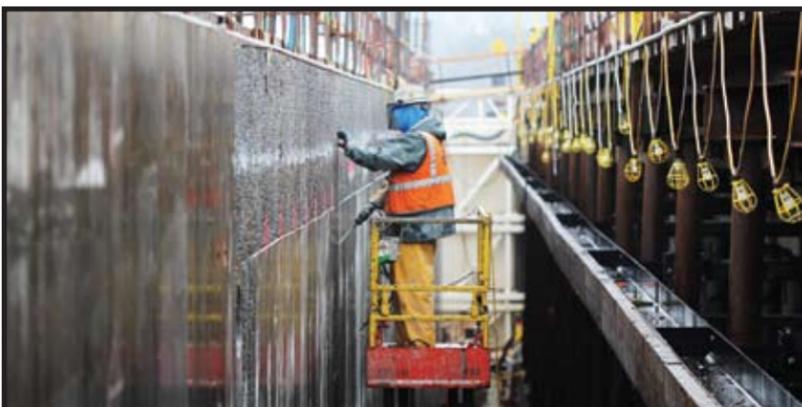


Pontoon Construction Project

Cycle 2 modifications to four pontoons in Aberdeen casting basin:

- Add transverse post-tensioning
- New scope, materials, and labor

Change order amount: \$22.4 M

FUTURE CHANGE ORDERS

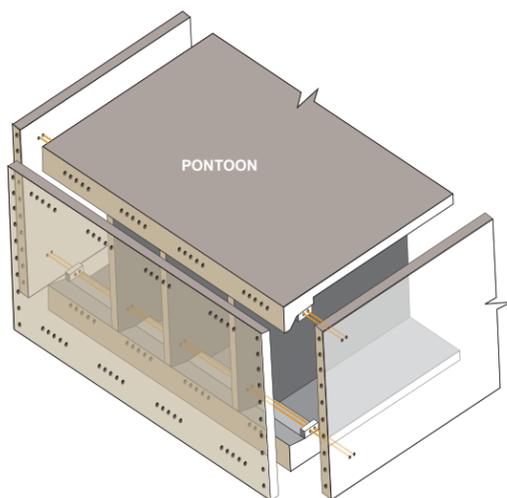

Pontoon Construction Project

Cycles 3-6 changes:

- Add transverse post-tensioning (redesign)
- New scope, materials, and labor
- Adjust schedule of pontoon delivery dates

Change order amount: TBD



Floating Bridge and Landings Project

Floating bridge and landings schedule change that includes new pontoon delivery dates

Change order amount: TBD